





PRODUCT DESCRIPTION

The *SDA LOCK*, enables Self Drilling Anchors to be installed in vertical holes retaining them in place for resin injection or grouting.

The *SDA LOCK* is fitted to the Self Drilling Anchor between the drill bit and shoulder with no additional installation tools required.

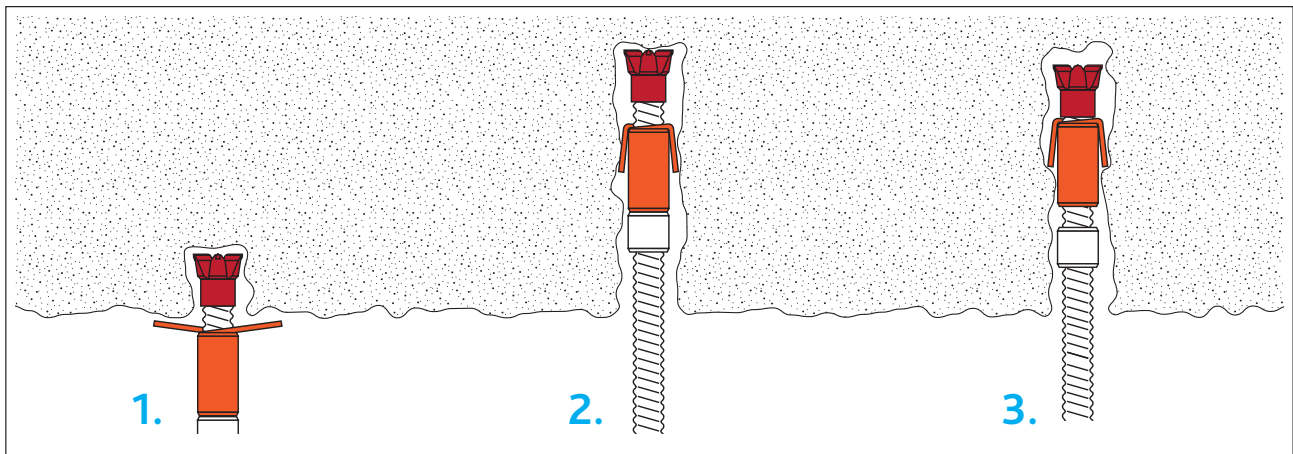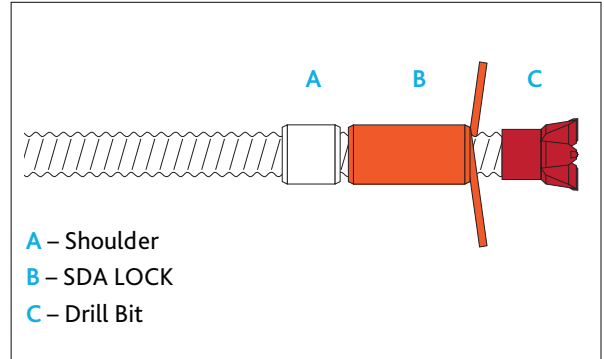

Use 1 SDA Lock per 3m length of SDA.



The *SDA LOCK* abuts the shoulder during drilling, the *SDA* rotates independently within the *SDA LOCK*. **1 & 2**

The drill bit rests on top of the *SDA LOCK* retaining the *SDA* in the hole prior to grouting or resin injection. **3**

TECHNICAL DATA

	PART	WEIGHT, kg	LENGTH, mm	HOLE SIZE, mm	PULL OUT RESISTANCE, kg
	SDA LOCK_T30_6.3mm	0.5	102	51	500
	SDA LOCK_R32_4mm	0.3	102	51	180
	SDA LOCK_R32_6.3mm	0.5	102	51	500
	SDA LOCK_R38_6.3mm	0.6	102	64	500

Testing conducted in 80 MPa concrete. Ground conditions may vary, contact us for solutions for your site requirements.